


VerA M

Powered plug-and-play portable set

Vera M is the complete solution where portable, powerful and reliable sound system is a must.

It features quad 6" plus 1" low distortion driver satellites and two effective 15" subwoofers. Driven by integrated Powersoft® amplifier and processing, Vera M is easy to set up and use, providing 6000W of nominal power.

DIMENSIONS

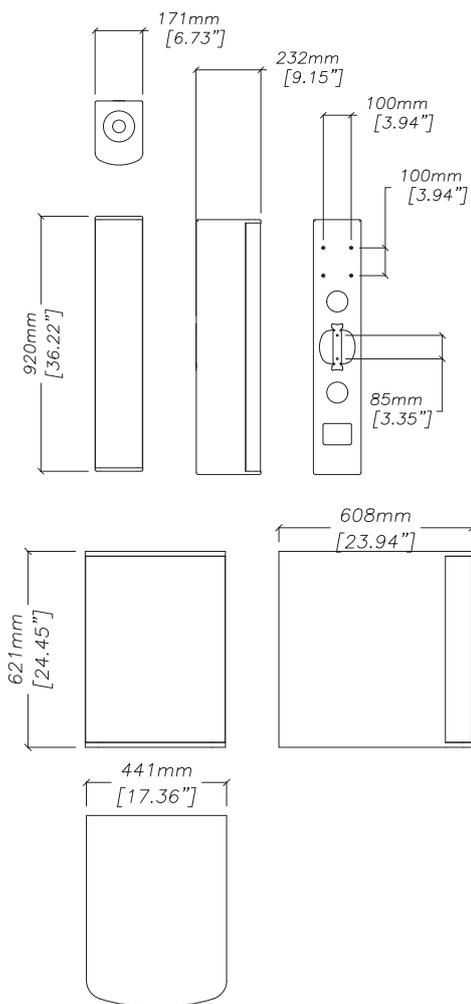

SPECIFICATIONS

Frequency response (-10dB)	42 – 20000 Hz
Max SPL (calculated)	132 dB (one sub + one top)
Sub driver	15"
Top drivers	4x 6" + 1"
Coverage (HxV)	90° x 40° (one side)
Amplifier	Class D Powersoft, Bi-amp, fan cooling
Total system power	6000 W
Amplifier channels	1500W + 1500W (one side)
Power consumption, 1/8 max power	1200W (both sides)
Power consumption, peak	6600W (both sides)
Input sensitivity	+4 dBV
Settings	4 switchable presets
Sub:	
Connectors	XLR input, XLR output, Powercon mains, top out Speakon
Mounting	Top pole socket
Dimensions (WxHxD)	441x621x608 mm (each)
Net weight	34,8 kg (each)
Gross weight	36,8 kg (each)
Enclosure materials	Plywood; wear resistant paint
Grill	Steel grill, acoustically transparent cloth
Top:	
Connectors	Neutrik Speakon
Mounting	35mm pole socket
Dimensions (WxHxD)	171x920x232 mm (each)
Net weight	15,4 kg (each)
Gross weight	17,4 kg (each)
Grill	Steel grill, acoustically transparent cloth

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

CONNECTIONS

FLY series powered systems are supplied with CN-0010 PowerCon-E/F CEE 7/7 mains cable (part number 0204000003). Use only original or supplied by manufacturer mains cables!

FLY series powered systems are equipped with PowerCon B mains power outlets for mains link to additional FLY series powered system.

FLY series systems' nominal mains power specifications: AC 220V, 50/60 Hz.

Nominal voltage tolerance: 100 – 250 V.

FLY series systems are equipped with XLR INPUT an XLR LINK connectors for signal connection.

Use of balanced XLR connector cables is recommended. In case when balanced XLR connections are not available, unbalanced XLR connection is acceptable.

For linking the additional system to the same signal bus LINK connector may be used.