
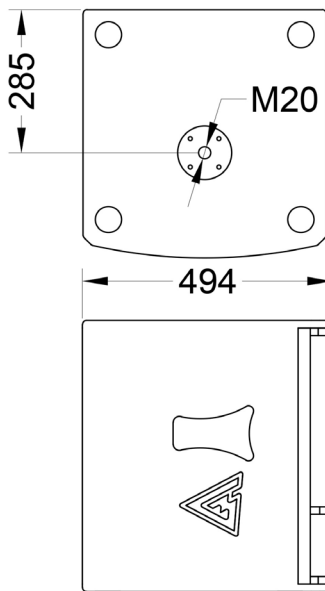
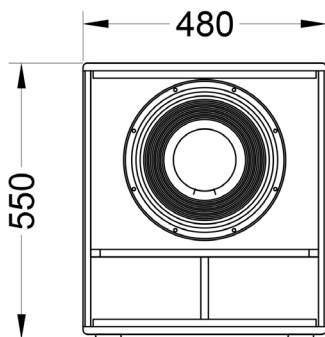


VERA II

POWERED SPEAKER SET

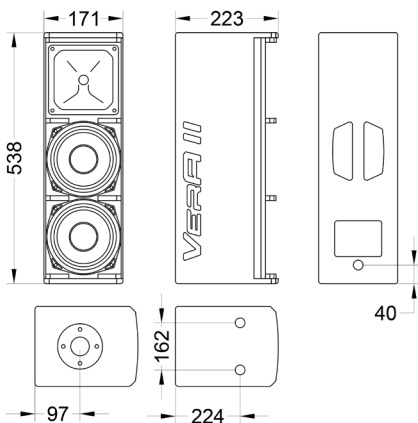

Main features:

- 2400W total power
- Two 12" vented-box subwoofer
- Two 2x6"+1" satellite speakers
- 128 dB Max SPL
- Integrated Powersoft® amplifiers with DSP
- Numerous installation options

Frequency Response (-10dB)	45 - 20000 Hz
Max SPL (peak)	128 dB (calculated) per one subwoofer and satellite
Subwoofer transducer	12", M1261 per unit
Top speakers' transducers	2x6"+1" (2x 6N101 + N4101)
Nominal coverage HxV	90° x 40°
Amplifier power	2x (700W+350W+150W)
Amplifier	Class D Powersoft®, Tri-amp Fan cooling
Input sensitivity	+4 dBV
Connectors	XLR female in, XLR male out Speakon for satellite

Dimensions (WxHxD)	171x538x223 mm
Net weight	9 kg
Mounting	Pole mount adapter 3x M10 flying paints
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, polymere protective net
Color	Black

Dimensions (WxHxD)	480x550x494 mm
Net weight	32 kg
Mounting	M20 distance pole adapter
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, polymere protective net
Color	Black

Acoustical & Electrical data

Connections, physical data
and exploitation - satellite speaker

Connections, physical data
and exploitation - subwoofer