
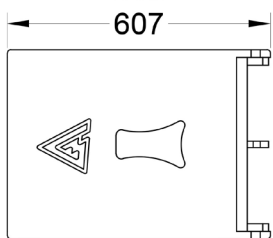
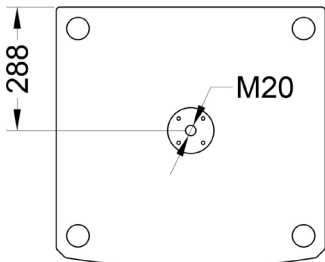
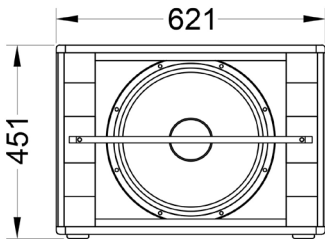


VERA IV

POWERED SPEAKER SET

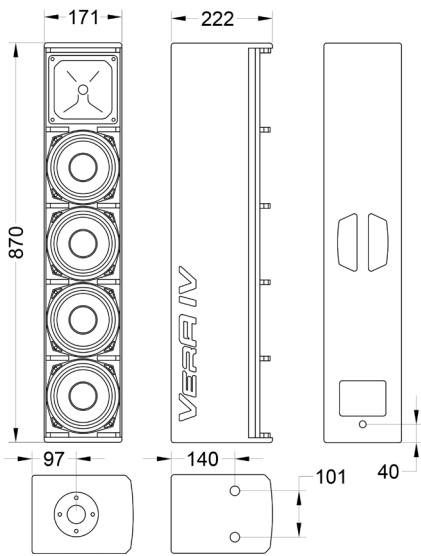

Main features:

- 3000W total power
- Two 15" vented-box subwoofer
- Two 4x6"+1" satellite speakers
- 131 dB Max SPL
- Integrated Powersoft® amplifiers with DSP
- Numerous installation options

Frequency Response (-10dB)	42 - 20000 Hz
Max SPL (peak)	131 dB (calculated) per one subwoofer and satellite
Subwoofer transducer	15", 15N500 per unit
Top speakers' transducers	4x6"+1" (4x 6N101 + N4101)
Nominal coverage HxV	90° x 40°
Amplifier power	2x (750W+750W)
Amplifier	Class D Powersoft®, Bi-amp Fan cooling
Input sensitivity	+4 dBV
Connectors	XLR female in, XLR male out Speakon for satellite speaker

Dimensions (WxHxD)	171x870x222 mm
Net weight	14 kg
Mounting	Pole mount adapter 3x M10 flying paints
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, polymere protective net
Color	Black

Dimensions (WxHxD)	621x450x607 mm
Net weight	39 kg
Mounting	M20 distance pole adapter
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill
Color	Black

Acoustical & Electrical data

Connections, physical data
and exploitation - satellite speaker

Connections, physical data
and exploitation - subwoofer