



M1862

LOW DISTORTION EXTENDED LOW FREQUENCY TRANSDUCER FOR BASS REFLEX AND BAND PASS SYSTEM




Main features:

- aluminum die-cast frame with improved voice coil ventilation;
- removable self-centering ferrite magnet system;
- inside-outside copper clad aluminum voice coil;
 - ventilated voice coil gap;
 - double silicon spider;
- double aluminum demodulation ring.




Main specifications:

- 18" nominal diameter;
- 1400 W AES program power;
- 98 dB 1W/1m sensitivity;
- 4" CCAW voice coil;
- 13 kg weight.

Frequency response

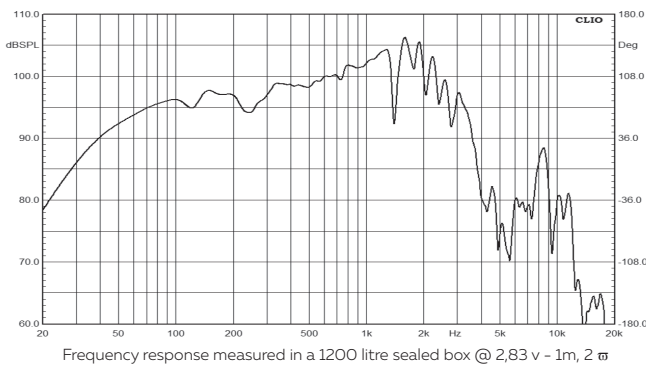

Free air impedance

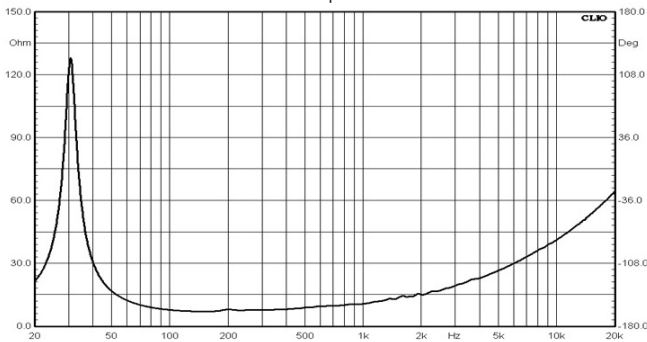

Nominal diameter, inches (mm)	18(460)
Nominal impedance, Ohm	8
Rated power (AES), W	700*
Frequency range, Hz	30-2000
Sensitivity (1W / 1m), dB	98
Minimum impedance, Ohm	6,9@155Hz
Bl product, Tm	23,7
Voice coil inductance, mH (1kHz)	0,81
Moving mass Mms, g	182

Diameter, inches (mm)	4(100)
Winding material	CCA W
Former material	glass fiber
Winding depth, mm	27
Magnetic gap depth, mm	12
Flux density, T	1,15

Fs, Hz	30,6
Vas, l	312
Qts	0,34
Qes	0,36
Qms	7,7
Re, Ohm	5,7
Sd, cm ²	1244
Xmax, mm	10,5***
n, %	2,4

Overall diameter, mm	465
Baffle cutout diameter, mm	414
Bolt hole diameter, mm	6,5
Bolt circle diameter, mm	440
Height, mm	210
Net weight, kg	13

Specifications

Voice coil and Magnetic system

Thiele-Small parameters**

Mounting information

* Rated power is determined according to AES2 - 1984 (r2003) standard.
 ** TS parameters are measured after a preconditioning power test.
 *** Xmax is calculated as: $(Hvc - Hg) / 2 + Hg / 4$ where Hvc is the voice coil winding depth and Hg is the gap depth.