



# N4102

## HIGH FREQUENCY LOW DISTORTION COMPRESSION DRIVER




### Main features:

- Capton dome diaphragm;
- Neodymium magnet system;
- Shorting copper ring.


### Main specifications:

- 1" Throat diameter;
- 100 W AES program power;
- 110 dB 1W/1m sensitivity;
- 1,75" aluminium voice coil;
- 1,4 kg weight.

Frequency response

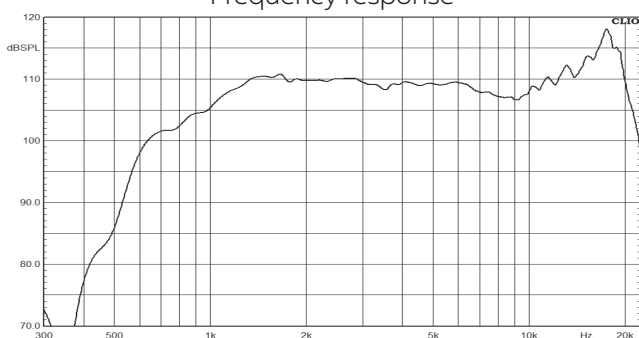

Free air impedance

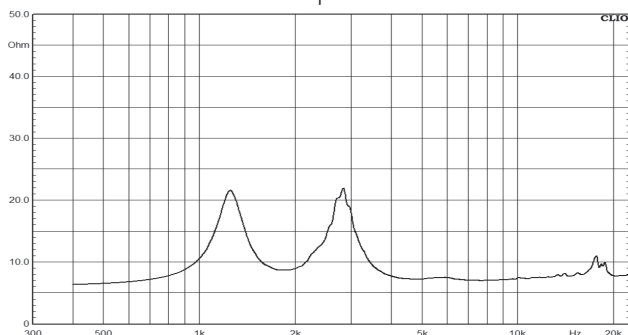

Throat diameter, inches (mm)	1(25,4)
Nominal impedance, Ohm	8
Rated power (AES), W	50*
Frequency range, Hz	1000-20000
Recomended crossover Hz	1500
Sensitivity (1W / 1m), dB	110

Specifications

Diameter, inches (mm)	1,75(44)
Winding material	aluminum
Diaphragm material	capton
Magnet material	neodymium
Flux density, T	2

Voice coil and Magnetic system

Overall diameter, mm	102
Mounting holes	2x M6
Bolt circle diameter, mm	76
Height, mm	50
Net weight, kg	1,4

Mounting information

\* Rated power is determined according to AES2 - 1984 (r2003) standard.

