



M210

HIGH FREQUENCY COMPRESSION DRIVER




Main features:

- Titanium dome diaphragm;
- Ferrite magnet system.
- Extended bandwidth.


Main specifications:

- 2" Throat diameter;
- 250 W AES program power;
- 109 dB 1W/1m sensitivity;
- 4" aluminium voice coil;
- 10 kg weight.

Frequency response

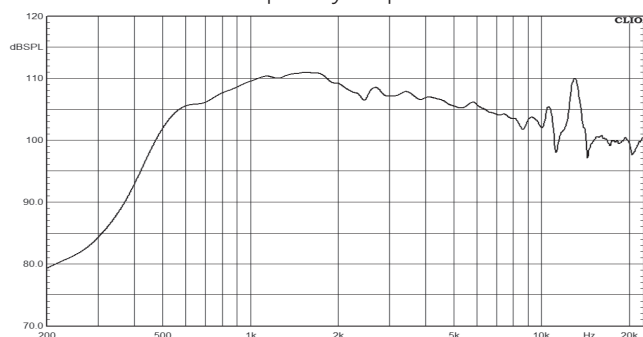

Free air impedance

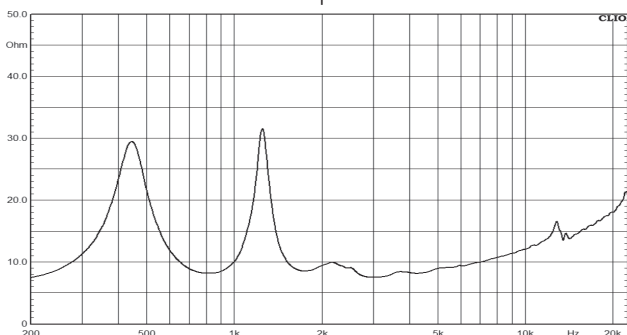

Throat diameter, inches (mm)	2(51)
Nominal impedance, Ohm	8/16
Rated power (AES), W	125*
Frequency range, Hz	600-18000
Recomended crossover Hz	600
Sensitivity (1W / 1m), dB	109

Specifications

Diameter, inches (mm)	4(99)
Winding material	aluminum
Diaphragm material	titanium
Magnet material	ferrite
Flux density, T	1,85

Voice coil and Magnetic system

Overall diameter, mm	220
Mounting holes	4x M6
Bolt circle diameter, mm	101,6
Height, mm	130
Net weight, kg	10

Mounting information

* Rated power is determined according to AES2 - 1984 (r2003) standard.

