

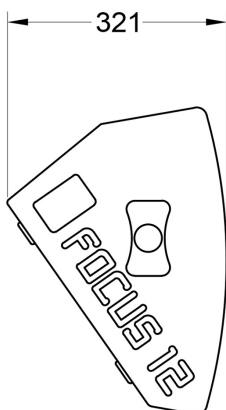


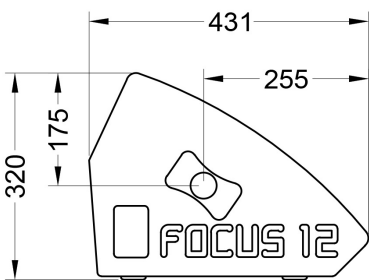

# FOCUS 12

VERSATILE PASSIVE  
STAGE MONITOR

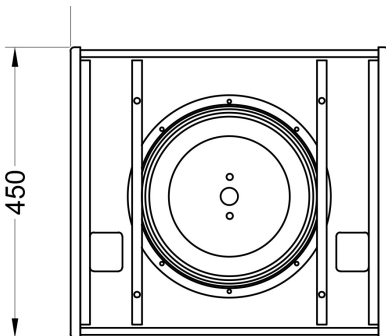

## Main features:

- 400W nominal power
- 12" coaxial driver with 2,8" VC HF section
- 128,5 dB Max SPL
- Bi-amp/passive crossover mode
- Pole mount adapter

Frequency Response (-10dB)	70 - 20000 Hz
Max SPL (peak)	128,5 dB (calculated)
Sensitivity (1W/1m)	96,5 dB
Coaxial driver	12", CX 12-2
Nominal coverage HxV	40° x 60° or 60° x 40° Rotating horn selectable
Impedance	8 Ohm
Nominal power	400 W
Program power	800 W
Peak power	1600 W
Connectors	2x Neutrik Speakon
Dimensions (WxHxD)	490x320x431 mm
Net weight	18,5 kg
Shipping weight	21 kg
Mounting	Pole mount adapter U-Bracket flying mount (optional)
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, polymere protective net
Color	Black

Acoustical & Electrical data

Connections, physical data  
and exploitation