


## N 10 FULL-RANGE PASSIVE SPEAKER





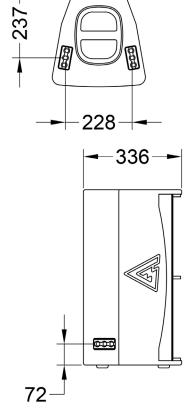



## Main features:

Frequency Response (-10dB)	65 – 18000 Hz
Max SPL (peak)	131 dB (calculated)
Sensitivity (1W/1m)	96,5 dB
LF Transducer	10"
HF Transducer	1,5"
Nominal coverage HxV	90° x 80°
Impedance	8 Ohm / 4 Ohm
Nominal power	600 W
Program power	1200 W
Peak power	2400 W

Connectors	2x Neutrik Speakon
Dimensions (WxHxD)	319x610x336 mm
Net weight	19 kg
Shipping weight	22 kg
Mounting	4x FlyTrack flying points Pole mount adapter
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent foam

Acoustical & Electrical data

Connections, physical data and exploitation