

# NX 15i

Installation  
speaker




Premium NX series offers several solutions for any and all demanding sound applications. With the top-class transducers of own design and improved voice coil cooling, NX series allows for prolonged high-SPL operation while preserving clarity and intelligibility.

Passive models feature low-distortion crossovers with optimal transfer characteristics, which allows for controlled tuning with external amplification.

Passive full-range speaker, NX 15i is based on 15"+1,5" drivers and has been purpose-designed for installations. With well-thought-out construction and compact size, it provides considerable power and smooth sonic performance, fitting into any and all installations.



## DIMENSIONS

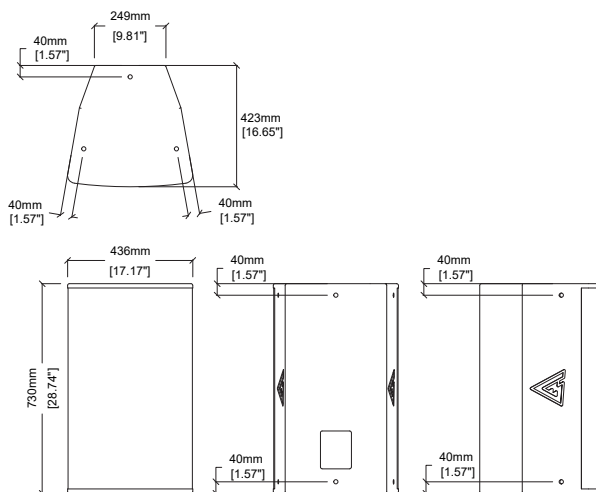

## SPECIFICATIONS

|                                |   |
|--------------------------------|---|
| Frequency Response (-10dB)     | 45 - 19000 Hz                                 |
| Max SPL <sup>1</sup>           | 134,5 dB                                      |
| Sensitivity (1W/1m)            | 98,5 dB                                       |
| LF Driver                      | 15", 3" VC                                    |
| HF Driver                      | 1,5", 2,8" VC                                 |
| Nominal Coverage Angle (H x V) | 80 x 70 deg                                   |
| Impedance                      | 8 Ohm   |
| Nominal power <sup>2</sup>     | 500 W   |
| Connectors                     | Phoenix                                       |
| Dimensions (W×H×D)             | 436x730x423 mm                                |
| Weight (Net/Shipping)          | 28 kg / 30 kg                                 |
| Mounting options               | M10 mounting points                           |
| Enclosure material             | Plywood, wear-resistant paint                 |
| Speaker protection             | Steel grill, acoustically transparent backing |

<sup>1</sup> - pink noise, filtered according to AES 2 - 2012, crest factor 9 dB  
<sup>2</sup> - based on transducer power measured according to AES 2 - 2012

## CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.

Speaker system comes with barrier strip screw terminal for amplifier connection.

|                             |                                   |
|-----------------------------|-----------------------------------|
| Signal +                    | + Terminal Phoenix                |
| Signal -                    | - Terminal Phoenix                |
| High pass filter:           |                                   |
| Freq, no less than          | 45 Hz                             |
| Order, no less than         | 18 dB/oct                         |
| Recommended amplifier power | 500 - 1000 W on nominal impedance |

## ACCESSORIES



**ANX15**  
Flying adapter



**LNX15**  
Double bracket



**HNX15**  
Horizontal bracket

## SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speaker or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.