
Tel./Fax: +38 044 277-47-89

Z 220 FULL-RANGE PASSIVE SPEAKER



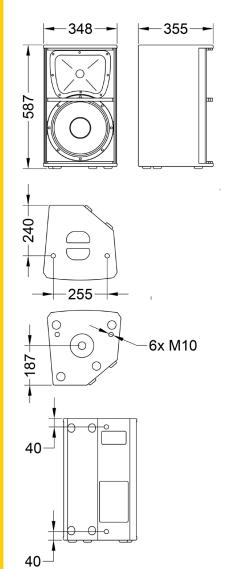

Main features:

Frequency Response (-10dB)	55 – 18000 Hz
Max SPL (peak)	128 dB (calculated)
Sensitivity (1W/1m)	96 dB
LF Transducer	12"
HF Transducer	1"
Nominal coverage HxV	100° x 50°
Impedance	8 Ohm / 4 Ohm
Nominal power	400 W
Program power	800 W
Peak power	1600 W

Connectors	2x Neutrik Speakon
Dimensions (WxHxD)	348x587x355 mm
Net weight	17 kg
Shipping weight	20 kg
Mounting	10x M10 flying points Pole mount adapter
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, polymer protective net

Connections, physical data and exploitation

Acoustical & Electrical data