



M112

HIGH FREQUENCY COMPRESSION DRIVER




Main features:

- Titanium dome diaphragm;
- Ferrite magnet system.


Main specifications:

- 1" Throat diameter;
- 100 W AES program power;
- 108 dB 1W/1m sensitivity;
- 1,75" aluminium voice coil;
- 1,65 kg weight.

Frequency response

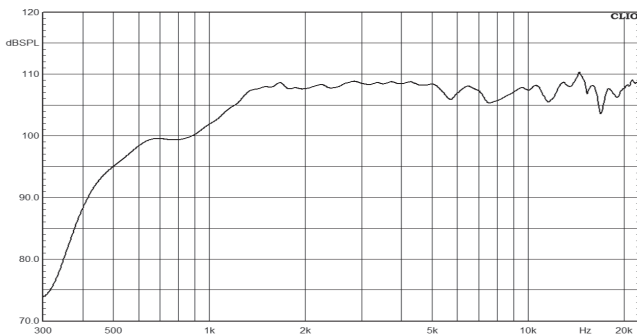

Free air impedance

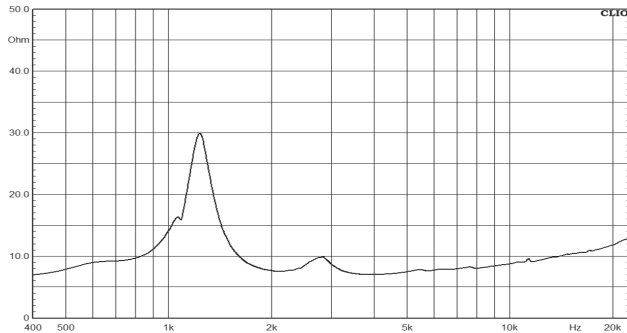

Throat diameter, inches (mm)	1(25,4)
Nominal impedance, Ohm	8/16
Rated power (AES), W	50*
Frequency range, Hz	1500-18000
Recomended crossover Hz	1800
Sensitivity (1W / 1m), dB	108

Specifications

Diameter, inches (mm)	1,75(44)
Winding material	aluminum
Diaphragm material	titanium
Magnet material	ferrite
Flux density, T	1,7

Voice coil and Magnetic system

Overall diameter, mm	115
Mounting holes	2x M6
Bolt circle diameter, mm	76
Height, mm	54
Net weight, kg	1,65

Mounting information

* Rated power is determined according to AES2 - 1984 (r2003) standard.

